


HONDA ENGINES


GXV160 SPECIFICATIONS



Dimensions diagrams

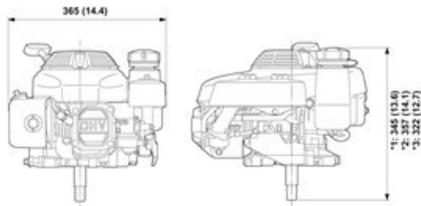

Performance Curve



SPECIFICATIONS

Engine Type	AIR-COOLED 4-STROKE OHC
Bore x Stroke	64 MM X 50 MM
Displacement	160 CM ³
Net Power Output*	4.4 HP (3.3 KW) @ 3,600 RPM
Net Torque	6.9 LB-FT (9.4 NM) @ 2,500 RPM
PTO Shaft Rotation	COUNTERCLOCKWISE (FROM PTO SHAFT SIDE)
Compression Ratio	8.5:1
Fuel Tank Capacity	0.93 LITRES (0.98 U.S. QTS)
Carburetor	HORIZONTAL TYPE BUTTERFLY VALVE
Ignition System	TRANSISTORIZED MAGNETO
Starting System	RECOIL/ELECTRIC
Lubrication System	SPLASH
Governor System	CENTRIFUGAL MECHANICAL
Air Cleaner	DRY (PAPER FILTER)
Oil Capacity	0.55 LITRES (0.58 U.S. QTS)
Fuel	UNLEADED 86 OCTANE OR HIGHER
Dry Weight	10.0 KG (22.0 LBS)

DIMENSIONS

Length (min)	367 MM (14.4")
Width (min)	331 MM (13.0")
Height (min)	347 MM (13.7")

PTO SHAFT OPTIONS

A2 type	STRAIGHT SHAFT
AR type	N/A
B type	N/A
D type	N/A
E type	N/A
H type	N/A
K type	N/A
L type	N/A
N1 type	STRAIGHT SHAFT
N5 type	STRAIGHT SHAFT
N7 type	STRAIGHT SHAFT
P type	N/A
Q type	N/A
R type	N/A
S type	N/A
S3 type	STRAIGHT SHAFT
T type	N/A
V type	N/A

*The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at 3,600 rpm (net power) and at 2,500 rpm (max net torque). Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.